

ARK-1122C

Palm-size and 4 COM Ports Extendibility Intel® Atom™ N2600 Low Power Fanless Embedded Box PC

NEW



Features

- Sealed construction with fanless design with Intel® Atom™ N2600, 1.6 GHz
- Palm-size form factor : 134 x 94 x 43 mm
- Supports 4 x COM ports (2 x RS-232 & 2 x RS-232/422/485, select by BIOS)
- Supports 1 x VGA and 4 x USB 2.0 ports
- Built-in 1 x half size Mini PCIe expansion slot (i.e.: WiFi module)
- Supports mSATA storage
- Wide operating temperature -20 ~ 60° C support
- Optional VESA / DIN-Rail / Wall mounts
- Optional SUSIAccess and embedded software APIs



SUSIAccess
Remote Device Management




CE FCC




Specifications

		ARK-1122C-S6A1E
Processor System	CPU	Intel Atom DC N2600 1.6 GHz
	System Chipset	Intel NM10
	BIOS	AMI EFI 16 Mbit
Memory	Technology	DDR3 800 MHz, up to 4 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel Atom N2600
	Interface	VGA (1920 x 1200)
Ethernet	LAN	1 x GbE Intel 82583V LAN
Audio	Chipset	Realtek ALC892, High Definition Audio (HD)
	Interface	-
I/O Interface	Serial Ports	2 x RS-232, 2 x RS-232/422/485, selected by BIOS
	USB Interface	2 x USB ports, USB2.0 Compliant (2.5" HDD) 4 x USB ports, USB2.0 Compliant (SATA)
Other	Watchdog timer	255-level timer interval, setup by software
Expansion	Mini PCIe	1 x half-size Mini PCIe
	2.5" HDD/SSD	2.5" HDD optional by T-Part
Storage	mSATA	1 x full-size Mini PCIe slot
Software Support	Microsoft Windows	Windows 7 Pro, WES7, XP Embedded
Power Requirement	Power Type	Single 12 V _{DC} power input (Supports lockable DC Jack design)
	Power Input Voltage	Supports single 12 V input, ± 10%
	Power Adaptor	AC to DC, DC12 V/3 A, 36 W
Mechanical	Construction	Aluminum housing
	Mounting	Desk/Wall-mounting; VESA mounting
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.7" x 3.71")
Environmental and Certifications	Operating Temperature	With standard temperature HDD/SSD/mSATA devices: 0 ~ 40° C With extended temperature SSD/mSATA devices: -20 ~ 60° C
	Storage Temperature	-40 ~ 85° C (-40 ~ 185° F)
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With mSATA: 3Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1hr/axis
	Shock During Operation	With mSATA: 30Grms, IEC 60068-2-27, half sine, 11ms duration
	EMC	CE/FCC Class A, CCC, BSMI
	Safety Certifications	CB, UL, CCC, BSMI

Dimensions

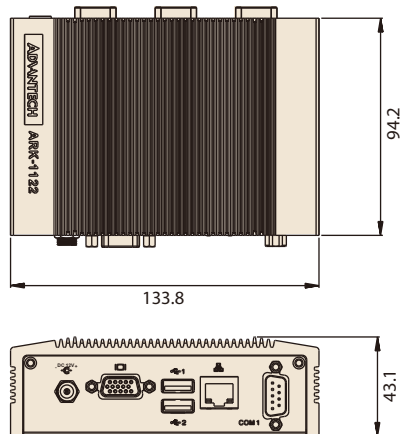


DIN Rail




Unit: mm (inch)


VESA mount



Front Panel External I/O Mechanical Layout/Drawing

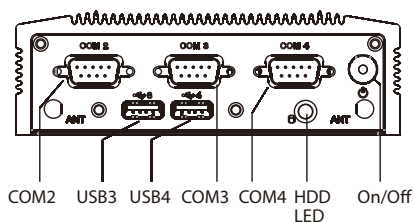

Rear Panel External I/O Mechanical Layout/Drawing

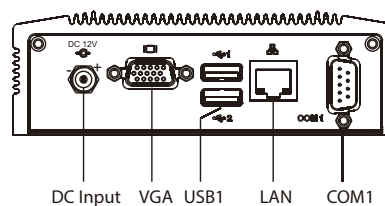

ARK-1122 Product Ordering Information



ARK-1122C-S6A1E

- Intel Atom N2600 1.6GHz w/4COM+4USB+LAN



ARK-1122H-S6A1E

- Intel Atom N2600 1.6GHz w/HDMI+VGA+LAN

ARK-1122HS-S6A1E

- 2G RAM+320G HDD+WES7+SUSIAccess Pro



ARK-1122F-S8A1E

- Intel Atom N2800 1.8GHz w/HDMI+3USB+2LAN

ARK-1122FS-S8A1E

- 2G RAM+16G mSATA+WES7+SUSIAccess Pro

Packing List

Part Number	Description
-	1 x ARK-1122 unit
-	1 x Driver/Utility CD/Manual
-	1 x Traditional Chinese user manual for CCC
-	1 x China RoHS
1757004096-01	1 x AC to DC adapter DC12 V/3 A 36 W, 0 – 40° C for Home and Office use

Embedded OS

(Only available for T-Parts OEM, and CTOS service)

Part Number	Description
2070011879	WES7 for ARK-1122H & ARK-1122F
2070011881	WES7 for ARK-1122C
2070011882	WES2009 for ARK-1122H & ARK-1122F
2070011880	WES2009 for ARK-1122C

Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180cm, USA type
170203183C	Power Cable 3-pin 180cm, Europe type
170203180A	Power Cable 3-pin 180cm, UK type
1700008921	Power Cable 3-pin PSE Mark 183cm
1960052227N001	ARK-1120 VESA/Desk mount bracket
9666112000E	DIN Rail mounting kits for ARK-112X series